
SE 09 - Double Airwalker



improvement of coordination, endurance and mobility

Stand on the foot plates and maintain a firm grip on the handles. Start walking!



Installation:

The device is delivered completely assembled and is screwed on top of the poured-in place foundation anchor (within the scope of supply). The Installation Guide can be found on www.saysu.de or upon request. Cover the ground anchor with filling material or with plastic covers (accessories).

For your draft we can supply 2D and 3D files.

Picture of the product may differ from original – subject to technical modification.



 length:
 1850 mm

 width:
 500 mm

 height:
 1600 mm

 floor space:
 0,93 m²

floor space required: 5800 x 3500 mm

volume: 1,48 m³ weight: 50 kg

plastic parts: AW564, AR764 (injection molding)

Petilen YY S 0464 (blow moulding)

RAL 5002 (ultramarine blue) or

RAL 2008 (bright red orange)

pipe measurements: diameter: wall thickness:

114 mm 3 mm 60 mm 4 mm 48 mm 2,6 mm 27 mm 2,6 mm

metal parts: stainless steel

certificates: TÜV and GS certified according to PPP

55012:2010 (based on parts of DIN EN

1176, 1177, 957)

user age: children under 14 years only

under surveillance of parents


maximum user weight: 130 kg

safe distance: 1,50 m

drop height: < 0,6 m (possible underground see

DIN 79000:2012-05 Tab. 2 or installation instructions)

safety system: stopper with damping system

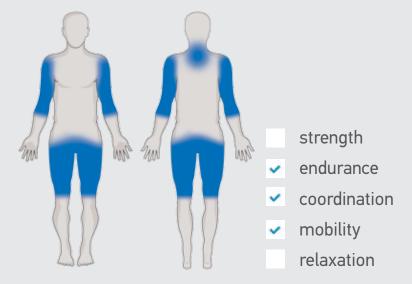

improvement of coordination, endurance and mobility

function: alternating back and forth movement of legs and arms

effect: improvement of endurance, coordination and balance skills

persons: 2 at the same time, interactive