


# SP 10 - Airwalker



improvement of **mobility** in the lower **back** and **endurance**

Stand on the foot plates and maintain a firm grip on the handles.  
Start walking!

\*You can extend this unit with as many modules as you desire,  
see SP 10 Airwalker System with extension module SP10.01.





**Installation:**

The device is delivered completely assembled and is screwed on top of the poured-in place foundation anchor (within the scope of supply). The Installation Guide can be found on [www.saysu.de](http://www.saysu.de) or upon request. Cover the ground anchor with filling material or with plastic covers (accessories).

For your draft we can supply 2D and 3D files.

Picture of the product may differ from original – subject to technical modification.



<b>length:</b>	1165 mm
<b>width:</b>	905 mm
<b>height:</b>	1400 mm
<b>floor space:</b>	1,05 m <sup>2</sup>
<b>floor space required:</b>	4165 x 4340 mm
<b>volume:</b>	1,48 m <sup>3</sup>
<b>weight:</b>	68 kg
<b>plastic parts:</b>	AW564, AR764 (injection molding) Petilen YY S 0464 (blow moulding) RAL 5002 (ultramarine blue) or  RAL 2008 (bright red orange) 
<b>pipe measurements:</b>	diameter: wall thickness:
	168 mm 4,5 mm
	60 mm 3,5 mm
	27 mm 2,5 mm
<b>metal parts:</b>	steel, zinc phosphated, powder coated RAL 9006 (white aluminium)

**certificates:** TÜV and GS according to „DIN 79000:2012-05 Permanently installed outdoor fitness equipment“


**user age:** children under 14 years only  
under surveillance of parents

**maximum user weight:** 130 kg

**safe distance:** 1,50 m

**drop height:** < 0,6 m (possible underground see  
DIN 79000:2012-05 Tab. 2 or  
installation instructions)

**safety system:** stopper with damping system

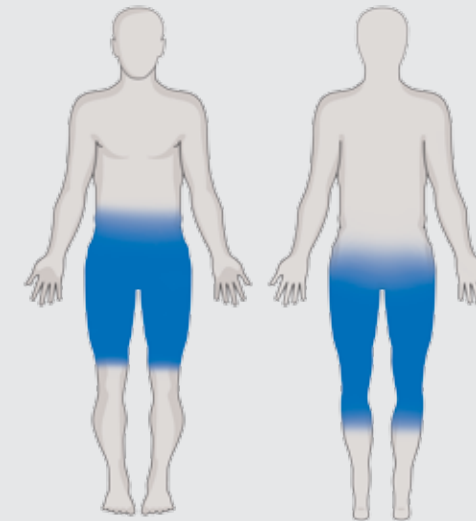

- strength
- endurance
- coordination
- mobility
- relaxation

improvement of **mobility** in the lower **back** and **endurance**

function: moving legs back and forward

effect: improvement of endurance and mobility

persons: 1